


UC300 S24 Cat.5e F/UTP PE

F/UTP AWG24/1 Installation Cable

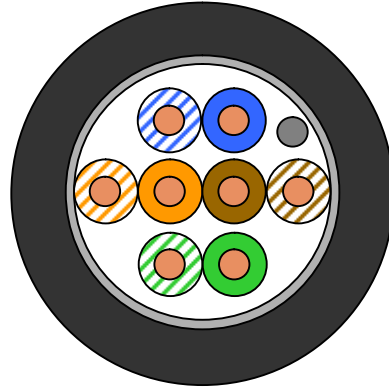

Application

Primary (Campus), Secondary (Riser), Tertiary (Horizontal)
IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T;
IEEE 802.5 16 MB; ISDN; TPDDI; ATM

Standards

EN 50173-1; EN 50288-2-1
ISO/IEC 11801; IEC 61156-5
TIA/EIA-568-B.2

Construction

Conductor	bare copper wire, Ø 0.51 mm (AWG24/1)
Insulation	PE, Ø 1.1 mm
Twisting	2 cores to the pair
Cable lay up	4 pairs to the core
Screen	Al-laminated plastic foil, Drain wire AWG26 tinned
Sheath	PE

Mechanical properties

Bending radius	without load	≥ 25 mm
	with load	≥ 50 mm
Temperature range	during operation	-20°C to + 60°C
	during installation	0°C to + 50°C

UC300 S24 Cat.5e F/UTP PE

Electrical properties

acc. to Cat.5e at 20°C

Loop resistance		≤ 190 Ω/km
Resistance unbalance		≤ 2%
Insulation resistance	(500 V)	≥ 2000 MΩxkm
Mutual capacitance	at 800 Hz	Nom. 48 nF/km
Capacitance unbalance	(pair/ground)	≤ 1500 pF/km
Mean characteristic impedance	100 MHz	100 ± 5 Ω
Nominal velocity of propagation		ca. 67%
Propagation delay		Nom. 535 ns/100 m
Delay skew		Nom. 20 ns/100 m
Test voltage	(DC, 1 min) core/core and core/screen	1000 V
Transfer impedance	at 1 MHz	≤ 50 mΩ /m
	at 10 MHz	≤ 100 mΩ /m
	at 30 MHz	≤ 200 mΩ /m
Coupling attenuation		55 dB
Segregation classification acc. EN 50174-2		“c”

Electrical data (nominal)

acc. to Cat.5e (at 20°C)

F (MHZ)	Attenuation (dB/100m)	NEXT (dB)	PS-NEXT (dB)	ACR (dB/100m)	PS-ACR (dB/100m)	ACRF (dB/100m)	PS-ACRF (dB/100m)	Return loss (dB)
1.0	1.9	71	68	69.1	66.1	68	65	20
4.0	3.7	62	59	58.3	55.3	56	53	23
10.0	6.0	56	53	50.0	47.0	48	45	25
16.0	7.6	53	50	45.4	42.4	44	41	25
20.0	8.5	51	48	42.5	39.5	42	39	25
31.2	10.7	49	46	38.3	35.3	38	35	24
62.5	15.7	44	41	28.3	25.3	32	29	22
100.0	19.8	41	38	21.2	18.2	28	25	20
125.0	22.3	40	37	17.7	14.7	26	23	19
155.5	24.2	38	35	13.8	10.8	24	21	
175.0	25.7	37	34	11.3	8.3	23	20	
200.0	27.5	36	33	8.5	5.5	22	19	
250.0	29.2	35	32	5.8	2.8	20	17	
300.0	32.0	34	31	2.0	-1.0	16	13	

UC300 S24 Cat.5e F/UTP PE

Product Code Table

Product code	Cable type	Brand name	Outer diameter	Weight	Copper content	Tensile force
			mm	kg/km		N
1001017	J-2Y(St)2Y 4x2x0,51	UC300 S24 Cat.5e F/UTP PE	7,8	54	19,8	80

Headline

Product Description	Product Code	PG Reference Code	PG Part Number
UC300 S24 C5e F/UTP 4P PE	1001017	60016745	60016745
UC300 S24 C5e F/UTP 4P PE 500DW	1001017-00500DW	60016745	60016746
UC300 S24 C5e F/UTP 4P PE 1000DW	1001017-01000DW	60016745	60016747

© PRYSMIAN GROUP 2011, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.